

**MEGMEET** | Stock code  
WELDING TECHNOLOGY | 002851

**MEGMEET Electrical Co., Ltd**  
**MEGMEET Welding Technology Co., Ltd**

Add: 4-5th Floor, Block 2, New Materials Industrial Park, No28,  
Langshan Road, Nanshan District, Shenzhen, Guangdong  
Province, China

[www.megmeet.com](http://www.megmeet.com) (MEGMEET Electrical)

[www.megmeet-welding.com](http://www.megmeet-welding.com) (MEGMEET Welding Technology)

E-mail: [welding@megmeet.com](mailto:welding@megmeet.com)

Tel: +86-755-8660 0555

MEGMEET Germany GmbH

Add: Stadtheider Str. 26-28,  
33609 Bielefeld, Germany

Tel: +49 521 588 131 40

Email: [welding@megmeet.com](mailto:welding@megmeet.com)

MEGMEET (Thailand) Co., Ltd

Add: 7/375 Moo 6, Tambon M  
abyangporn, Pluak Daeng,  
Rayong 21140

Tel: +66 (0) 33 012 666

Email: [welding@megmeet.com](mailto:welding@megmeet.com)

MEGMEET Electrical India Pvt Ltd

Add: Plot No. 140, Sector 7, IMT  
Manesar, Gurugram - 122052,  
Haryana

Tel: +91 12442 14460

Email: [welding@megmeet.com](mailto:welding@megmeet.com)

Follow us:



MEGMEET's strong technical strength, extensive industry application experience, relentless attention to customer needs, and the spirit of continuous innovation enable us to bring tailor-made products and solutions to help customers achieve greater success.

\*MEGMEET Welding Technology Co., Ltd is continuously striving to develop and innovate for new product. We reserves the right of changing the technical specifications and designs without notices in advance.  
Copyright 2024 © MEGMEET Welding Technology Co., Ltd

# Megwave H Series

Full Digital IGBT Inverter Multi-functional  
Super-low Spatter MIG Welding Machine



[www.megmeet-welding.com](http://www.megmeet-welding.com)

**MEGMEET**  
WELDING TECHNOLOGY

# Megwave H Series

Full Digital IGBT Inverter Multi-functional Super-low Spatter MIG Welding Machine

DC	380 3PH	40~70 Hz	CV	110 kHz
----	------------	-------------	----	------------

## Features

- Optimal welding programs in super-low spatter DC, quick pulse, high-speed weld and others. Be weldable in multiple materials: carbon steel, stainless steel, aluminum alloy and others;
- "Chopper" control technology in the combination of hardware & software to precisely control droplet, realize DC super-low spatter performance, and reduce spatter by more than 90%;
- Unique quick pulse process integrates advantages of pulse and DC short circuit, and welding speed is increased by more than 20% compared with conventional pulse welding;
- Wider voltage range, high current and low voltage, lower heat input, higher fusion efficiency, thin plate welding is comparable to TAP-TYPE machine;
- Adaptive arc-start retraction technology increases arc start success rate to almost 100%;
- Three-level main power topology structure and inverter frequency up to 110kHz enable higher control precision and more stable arc;
- Comprehensive communication interfaces are able to communicate with different brands of robots;
- Touch sensing function with 80-400 voltage is easier to break down the rust on the surface of workpiece;
- IOT interface is reserved to connect with Megmeet SMARC cloud system;
- U-disk upgrade function ensures customers to easily obtain Megmeet's most cutting-edge welding technology;
- Application industries: engineering machinery, steel structures, special vehicles, auto parts, two/tricycles, containers, petroleum and petrochemical industries, etc.



### Megwave 500HLP/350HLP

<input checked="" type="checkbox"/> Super-low Spatter CO <sub>2</sub> /MAG	<input checked="" type="checkbox"/> Pulse MIG/MAG	<input checked="" type="checkbox"/> Quick Pulse MIG/MAG
<input checked="" type="checkbox"/> Carbon Steel	<input checked="" type="checkbox"/> Stainless Steel	
<input type="checkbox"/> Aluminum Alloy	<input checked="" type="checkbox"/> U-disk Interface	
<input checked="" type="checkbox"/> IOT Interface	<input type="checkbox"/> Other Customization	

### Megwave 500HLD/350HLD

<input checked="" type="checkbox"/> Super-low Spatter CO <sub>2</sub> /MAG	<input type="checkbox"/> Pulse MIG/MAG	<input type="checkbox"/> Quick Pulse MIG/MAG
<input checked="" type="checkbox"/> Carbon Steel	<input checked="" type="checkbox"/> Stainless Steel	
<input type="checkbox"/> Aluminum Alloy	<input checked="" type="checkbox"/> U-disk Interface	
<input checked="" type="checkbox"/> IOT Interface	<input type="checkbox"/> Other Customization	

### Megwave 500HLT/350HLT

<input checked="" type="checkbox"/> Super-low Spatter CO <sub>2</sub> /MAG	<input checked="" type="checkbox"/> Pulse MIG/MAG	<input checked="" type="checkbox"/> Quick Pulse MIG/MAG
<input checked="" type="checkbox"/> Carbon Steel	<input checked="" type="checkbox"/> Stainless Steel	
<input checked="" type="checkbox"/> Aluminum Alloy	<input checked="" type="checkbox"/> U-disk Interface	
<input checked="" type="checkbox"/> IOT Interface	<input checked="" type="checkbox"/> Other Customization	



Standard     N/A     Customization




## Super-low Spatter Technology

110kHz high-frequency hardware system combined with patented algorithm can realize precise "chopper" control, which greatly reduces spatter caused by liquid-bridge bursting and electromagnetic repulsion, and helps fusion pool more stable and weld shape more beautiful.



### Welding Features:

- Soft arc, low and small spatter, 90% less spatter than conventional DC welding machine. Grinding work is reduced to improve production efficiency;
- Lower heat input, suitable for thin plate welding;
- Smooth droplet transfer, calm fusion pool, low heat input, strong ability in bridge-welding, be adaptive in large-gap welding;
- Wider range in low spatter welding: thin-plate carbon steel,  $\Phi 1.2\text{mm}$  wire. Low spatter current range can reach 210A, 20% higher than other similar welding machines.

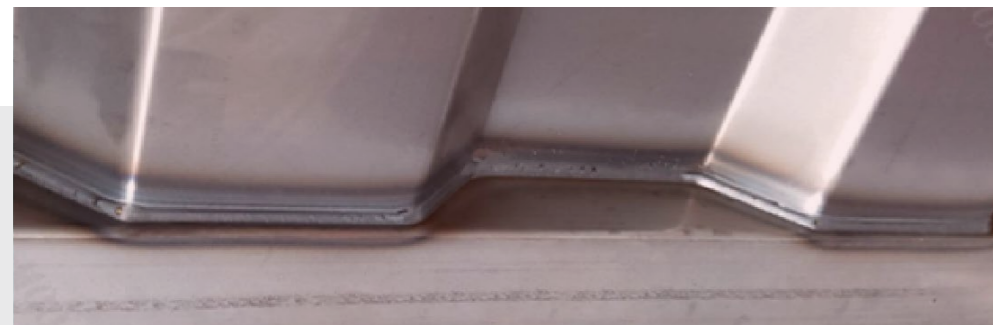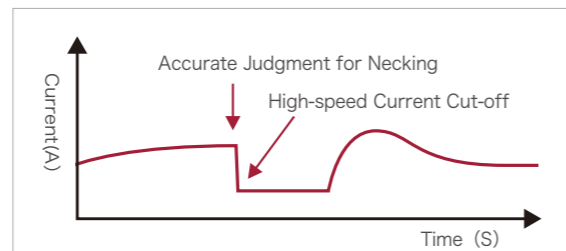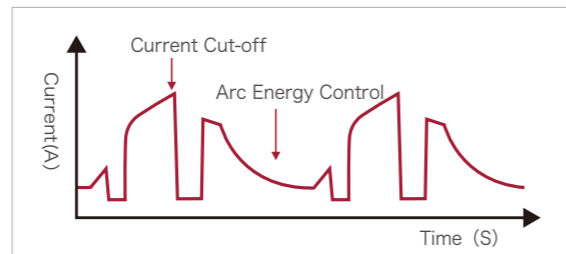

## Quick Pulse Technology(QPT)

Unique quick pulse welding technology adopts three-level main power topology. High-speed sampling and control advantages, brought by the inverter frequency up to 110kHz, can reach critical state between short circuit and pulse spray transition. With shorter droplet transition distance, lower arc and faster welding speed, pulse speed is increased by more than 20%. Service life of wearing parts is lengthened and weld shape is better, meeting actual needs of manual welding.


### Pain Points in Conventional Pulse Welding

- Speed is slow: 30% slower than DC welding;
- Weld formation is difficult to control: high heat input, long arc and many undercuts;
- High Requirements in Mixed Gas: high requirement in the 80/20 gas ratio and resulted higher cost;
- Accessories Loss: high voltage and high pulse peak value bring serious heating to torch, and high cost of accessories and shorter service life.


VS

### Megmeet Quick Pulse Technology(QPT)

- Welding speed is faster and welding speed is increased by 20%, compared with conventional pulse;
- Short arc length, good stiffness, strong anti-interference ability, more suitable for high-speed welding of medium and thick plates, supporting concentrated arc energy and better penetration;
- Low arc heat input increases service life of accessories;
- Wide voltage range, strong welding adaptability, simpler operation, more popular by welders.

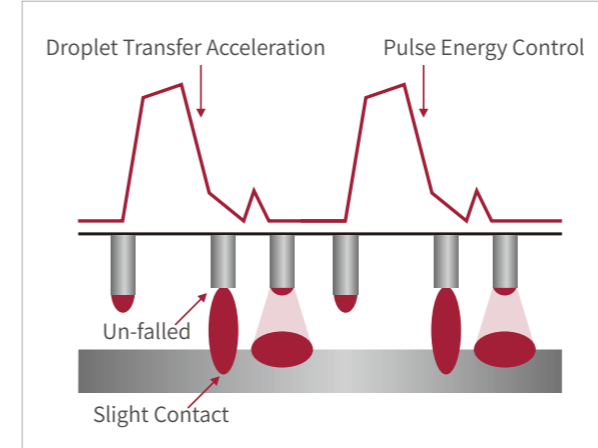


Construction Machinery

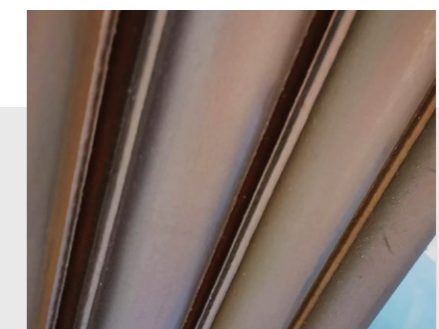

Boiler Membrane Wall


## High Speed DC Welding

- With wider adaptive range of voltage, the same current is able to match lower voltage (10% lower than other welding machines);
- Lower heat input, higher deposition efficiency, thin-plate welding performance be comparable with tap-type machine.

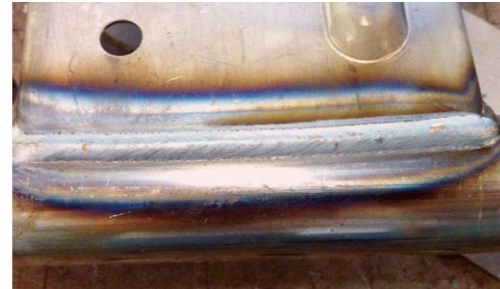

## Wire Retraction Function in Arc Starting

- When welding machine detects arc starting signal, wire will retract in high speed, which greatly improves the quality and success rate of arc starting, and greatly reduces various arc starting issues.

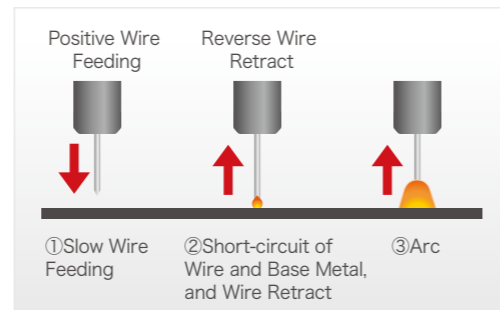

## Up-down Torch (optional)

- Up-down torch is optional to conveniently adjust welding parameters on the torch(current, voltage, etc).




## High Reliability



Strong environmental adaptability, suitable for working under tough environment;




Stable and reliable: stability is the base of intelligent welding machines!

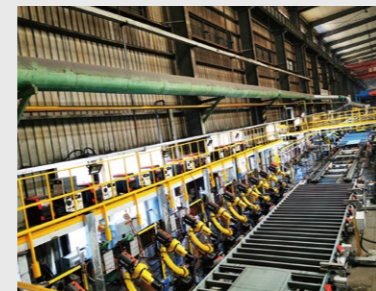

Consistency: consistent performance by any machine, our quality is consistent anytime and anywhere!

## 400V High-voltage Touch Sensing Function

- Built-in high-voltage touch sensing function with adjustable range 80~400V, no need to separately buy high-voltage touch sense device;
- High reliability and effective penetration of oil stains, rust, water stains, etc., fast touch-sense with high precision, and strong adaptability to robots;
- Current-limiting design ensures welding within safe current range, effectively protecting the safety of welders and welding machines;

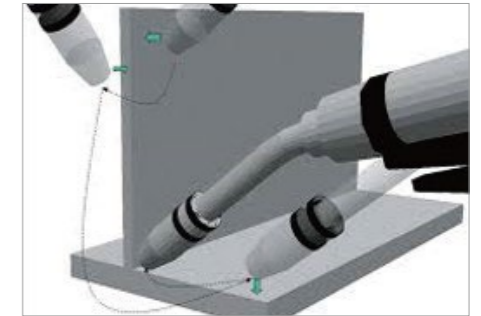

## U-disk Interface

- To ensure customers conveniently obtaining Megmeet's foremost welding programs and function customization; New software can be programmed into welding machines through U disk.



## Intelligent Upgrade

- With additional robotic accessories package, manual-type welding power source can be expanded to robotic welding power source to help users save money.



## Water Cooler (Optional)


Circulating Water Cooler AnyCool-66	
Water cooler power supply	Powered by welding machine
Rated power	370W
Rated voltage	380V AC
Cooling water capacity	6.8L
Cooling water flow	3.5L/min
Cooling water maximum lift	20m
Flow alarm	✓



# Product Specification

● Standard ○ Optional

Manual type	Megwave 500HLD	Megwave 350HLD	Megwave 500HLP	Megwave 350HLP	Megwave 500HLT	Megwave 350HLT
Robotic type	Megwave 500HLDR	Megwave 350HLDR	Megwave 500HLPR	Megwave 350HLPR	Megwave 500HLTR	Megwave 350HLTR
<b>Welding Programs</b>						
Super-low Spatter by Hardware	●	●	●	●	●	●
Low Spatter Arc (LSA by software)	●	●	●	●	●	●
Standard pulse	-	-	●	●	●	●
Quick pulse	-	-	●	●	●	●
Flux Core Carbon Steel/DC	●	●	●	●	●	●
Carbon steel	●	●	●	●	●	●
Stainless steel	●	●	●	●	●	●
Aluminum alloy	-	-	-	-	●	●
<b>Function</b>						
U-disk interface	●	●	●	●	●	●
SMARC interface	○	○	○	○	○	○
Push-pull welding torch interface	○	○	○	○	○	○
Wire feeder AV LED display (manual type)	○	○	○	○	○	○
<b>Technical Parameters</b>						
Control Method	Digital IGBT Control					
Input voltage	3-phase AC 380 V (±25%)					
Input frequency	40~70Hz	40~70Hz	40~70Hz	40~70Hz	40~70Hz	40~70Hz
Inverter switching frequency	110kHz	110kHz	110kHz	110kHz	110kHz	110kHz
Rated input capacity	24.1KVA/22.1KW	13.7KVA/12.6KW	24.1KVA/22.1KW	13.7KVA/12.6KW	24.1KVA/22.1KW	13.7KVA/12.6KW
No-load voltage	77V	77V	77V	77V	77V	77V
Rated output current	500A	350A	500A	350A	500A	350A
Rated output voltage	39V	31.5V	39V	31.5V	39V	31.5V
Duty cycle	30%@500A 100%@350A	100%@350A	30%@500A 100%@350A	60%@350A	30%@500A 100%@350A	100%@350A
Power factor	0.92	0.92	0.92	0.92	0.92	0.92
Efficiency	88%@500A	87%@350A	88%@500A	87%@350A	88%@500A	87%@350A
Output characteristics	CV	CV	CV	CV	CV	CV
Wire feeding speed	0.5~28m/min	0.5~28m/min	0.5~28m/min	0.5~28m/min	0.5~28m/min	0.5~28m/min
Parameter JOB	50 sets	50 sets	50 sets	50 sets	50 sets	50 sets
Operating temperature	-10°C~40°C (welding power source can be started at -39°C)					
Dimension(L×W×H)	647×291×572mm					
Weight	40kg	40kg	40kg	40kg	40kg	40kg
Enclosure rating	IP23 S	IP23 S	IP23 S	IP23 S	IP23 S	IP23 S
Insulation class	H	H	H	H	H	H
Cooling method	Forced air cooling					

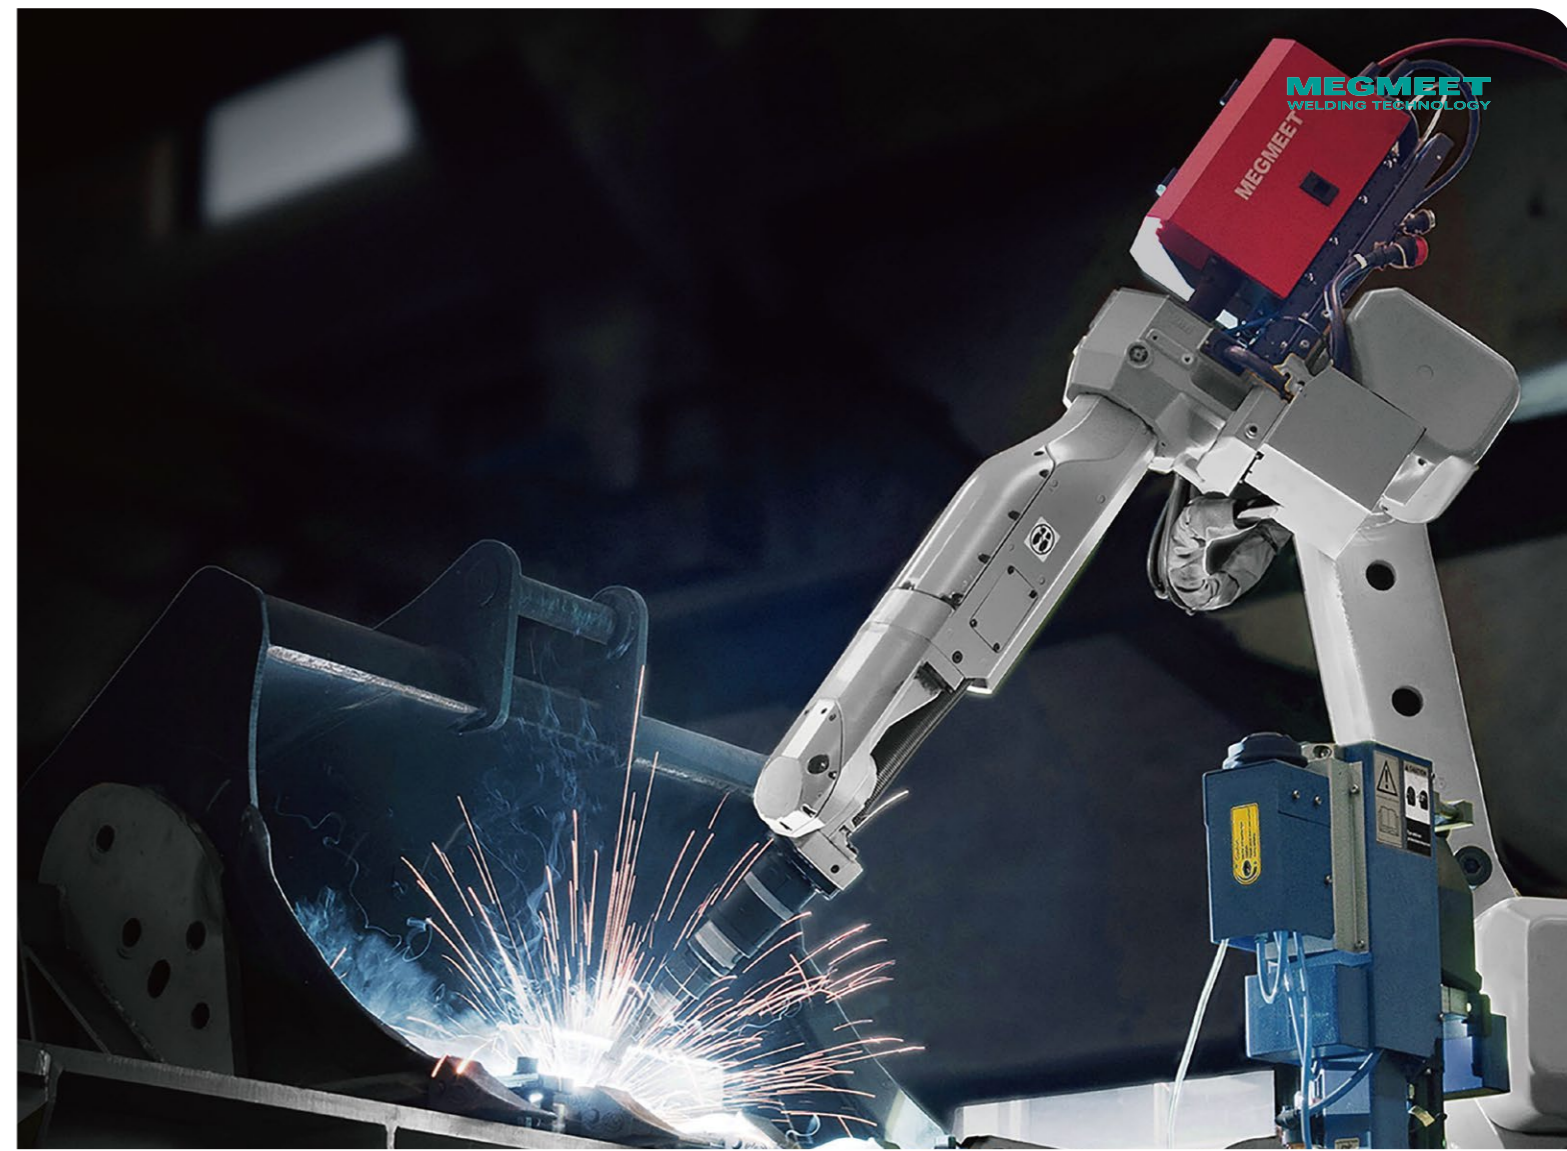

Embedded-Type communication module supports multiple types of communication protocols



